


HEX70HDUK-KIT firmware Upgrade Operation

Step 1:

1. Connect the micro-USB port to the PC
2. Reboot the unit, you will see a USB disk found on your PC as below, this indicates that the boot loader is working correctly.

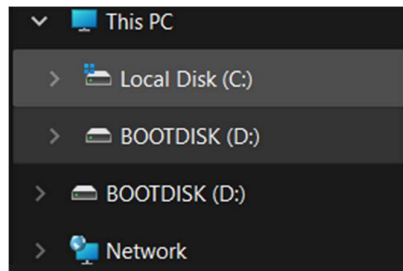

3. If the BOOTDISK USB disk does not appear, please check the connection/settings and reboot the device again until it appears.

Step 2:

1. When you open the disk, you will see a file named "Ready"

Name	Date modified	Type	Size
READY	16/11/2016 10:00 AM	Text Document	0 KB

2. *******IMPORTANT*****: YOU MUST RENAME THE UPDATE FILE NAME TO the following:**

- For HEX70HUDK-~~TX~~ it is FW_MERGT.bin
- for HEX70HUDK-~~RX~~ it is FW_MERGR.bin

3. Copy the **renamed** firmware file to the folder and an auto update process will happen (the disk will refresh, and the file name change to "Success" as shown below, this means the firmware is updated successfully). If the file name is not SUCCESS, please check the file name and connection then try this step again.

Name	Date modified	Type	Size
SUCCESS	16/11/2016 10:00 AM	Text Document	0 KB

4. After the firmware update has finished, disconnect the USB cable, then reboot the unit again.

Web-GUI Firmware Update

The web-GUI of the AMF42AU is used to configure and control the product through a web portal. The AMF42AU can be accessed on any internet connected device including: tablets, smart phones and laptops that are on the same network.

As the web-GUI is used to update the main matrix firmware it is important to make sure that the web-GUI firmware is the latest version. Please check your firmware version against the version available to download from the Blustream website.

To update the web-GUI firmware:

1) Login to the web-GUI update menu:

Default IP Address is: 192.168.0.200:100


Default Username is: [blustream](#) Default Password is: [1234](#)

Please note: the IP address may differ if default network settings have been updated. If this is the case, please replace the following with the products current IP address:


[XXX.XXX.XXX.XXX:100](#)

2) When you have accessed the web-GUI menu interface, expand the 'Administration' file in the menu tree by clicking the small '+' icon next to the file.

3) Select 'Upload Firmware':

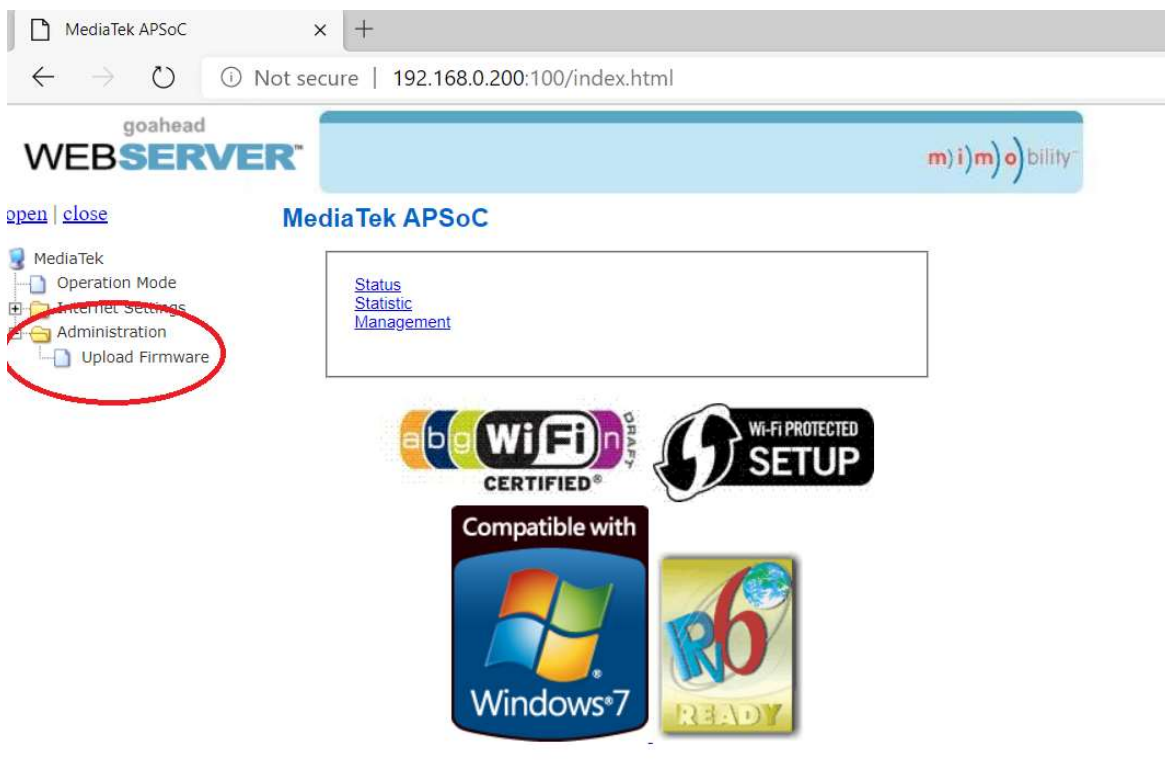

4) Click 'Choose File' and select the web-GUI/MediaTek firmware file downloaded from the Blustream website. This will be a .bin file:

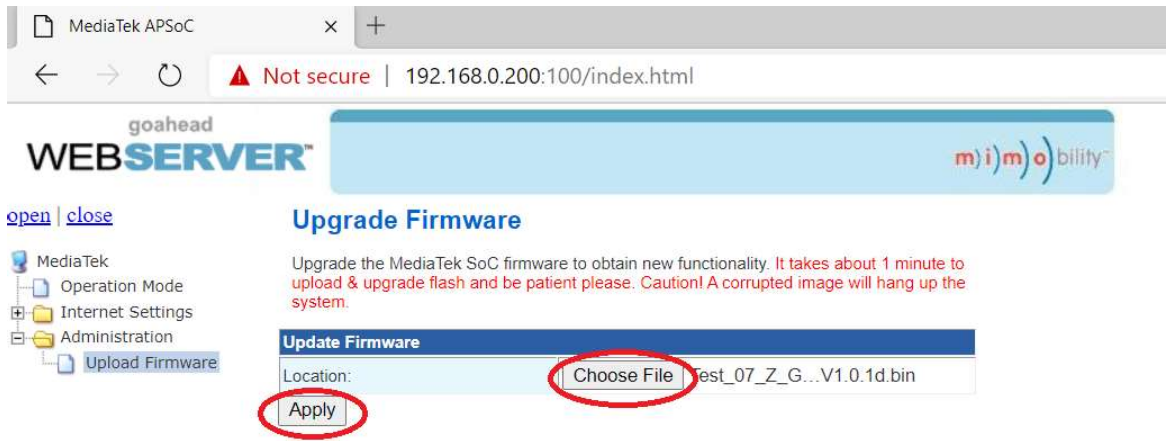

5) Press 'Apply' to begin the firmware update process.

The update process will take up to 1 minute to complete. Do not refresh or navigate away from this page until the update process has completed.

